


HGI Part No.  
SRC-9625-customer

15/12/2023 HENRY  
JTP  
APPROVED DOCUMENT

<input checked="" type="checkbox"/> PED 2014/68/EU		<input checked="" type="checkbox"/> AS2971.2		<input checked="" type="checkbox"/> UL207	
<input type="checkbox"/> CAT I	<input checked="" type="checkbox"/> CAT II	<input type="checkbox"/> CAT III			
Volume Ltrs	Shell ID mm	Design Pressure MPa	Leak Test Pressure MPa	Proof Test Pressure MPa	Min Burst Test Pressure MPa
3.0	Ø108	3.2	3.2	4.6	16.0

REV. 版本	ECN 工程变更通知	Description 变更描述	Name 变更人	Date 变更日期

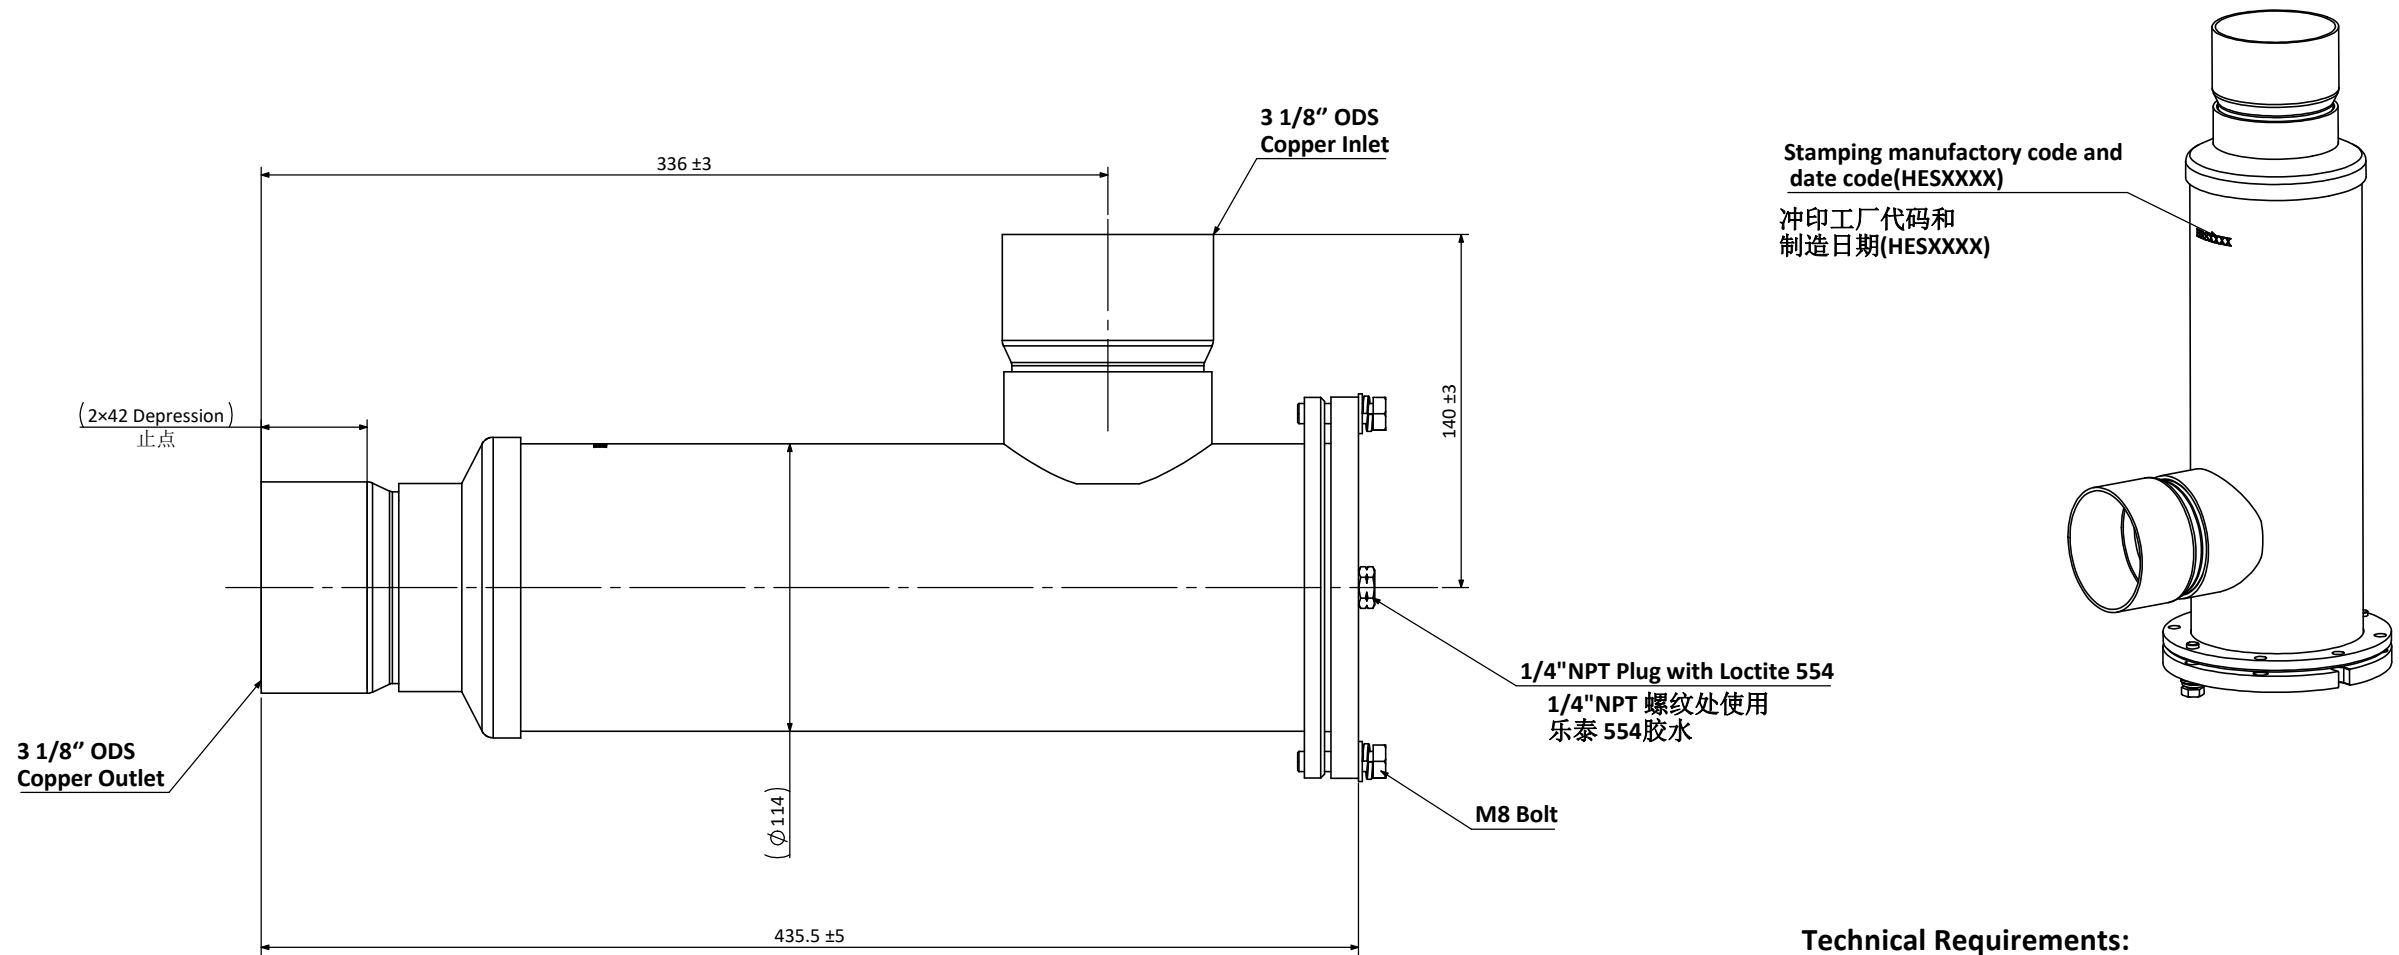

Stamping manufactory code and date code(HESXXXX)  
冲印工厂代码和制造日期(HESXXXX)

1/4" NPT Plug with Loctite 554  
1/4" NPT 螺纹处使用乐泰 554 胶水

M8 Bolt

**Technical Requirements:**  
技术要求:

1. Allowable operating temperature -40°C to +70°C;  
工作温度-40°C到+70°C;
2. Powder coating: Henry Blue RAL 5013.  
喷涂颜色: 亨利蓝RAL 5013;
3. Bolt pack must be packed with unit in carton;  
螺栓包随箱包装。

Description 产品名称	Replaceable Core Filter Drier Shell 可换滤芯干燥过滤器		
Drawing No. 图纸编号	M050505717	REV 版次	A
Material Master No. 物料编号	050505717	Drawing Size 图幅	A3
Material 材质	Refer Table	Sheet Number 页码	1/1
Attribute 属性	3 1/8" ODS	Third Angle Projection 第三视角	

Linear Dimensions 线性尺寸 (mm)	0 Decimal Place 整数	1 Decimal Place 1位小数	2 Decimal Place 2位小数	Angular Dimensions 角度尺寸	0 Decimal Place 整数	1 Decimal Place 1位小数	Estimated Weight 预估重量	N/A	Approved_by 批准	Julian Parker	2023/12/11
	±1.0	±0.2	±0.05		±2°	±0.5°					
Tolerance Unless Stated Otherwise 未注尺寸公差									Drawn_by 绘图	Angel Zhang	2023/12/11

