
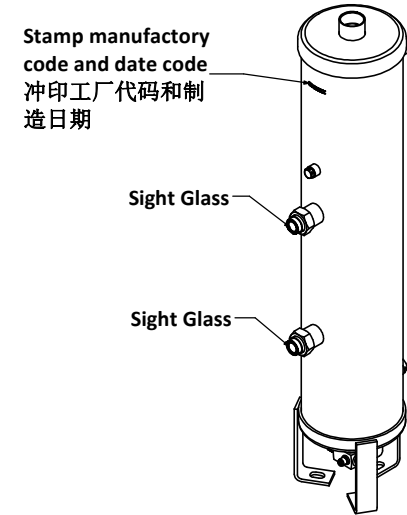
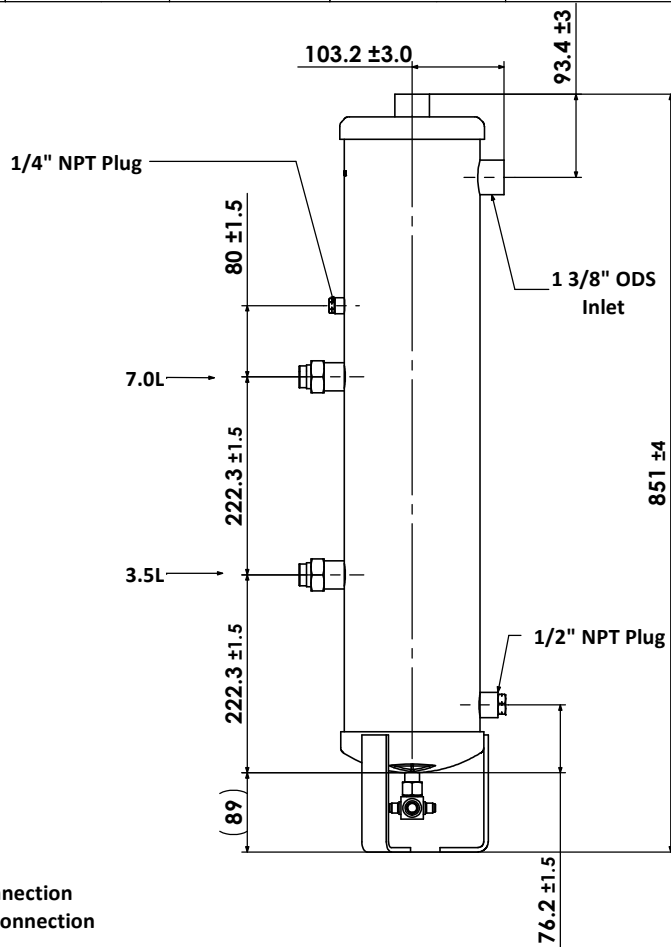



HGI Part No.		31/08/2022 HENRY JTP APPROVED DOCUMENT		<input checked="" type="checkbox"/> PED 2014/68/EU <input checked="" type="checkbox"/> AS2971.2 <input checked="" type="checkbox"/> UL207		REV. 版本	ECN 工程变更通知	Description 变更描述	Name 变更人	Date 变更日期
S-5390-GY-customer				<input type="checkbox"/> CAT I <input type="checkbox"/> CAT II <input checked="" type="checkbox"/> CAT III						
Volume Ltrs	Shell ID mm	Design Pressure MPa	Leak Test Pressure MPa	Proof Test Pressure MPa	Min Burst Test Pressure MPa					
12.05	Ø145.4	3.1	3.1	4.44	15.5					

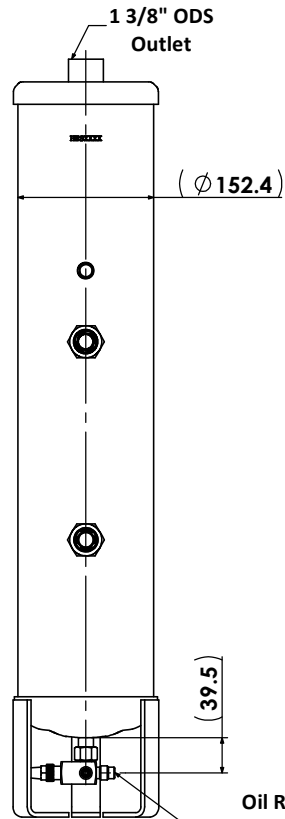

Stamp manufactory code and date code
冲印工厂代码和制造日期

Technical Requirements:
技术要求

1. Allowable operating temperature -10°C to +130°C;
工作温度-10°C到+130°C;
2. Powder coating: Gray RAL 7035;
喷涂颜色: 灰色RAL 7035 ;
3. Rotalock Valve and Gasket will be packed with product independently.
阀和垫圈随产品单独包装。

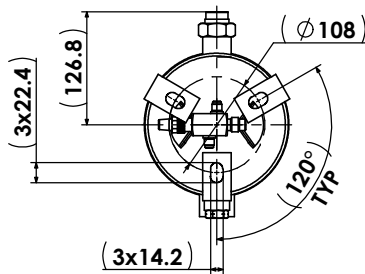

Linear Dimensions 线性尺寸 (mm)	0 Decimal Place 整数	1 Decimal Place 1位小数	2 Decimal Place 2位小数	Angular Dimensions 角度尺寸	0 Decimal Place 整数	1 Decimal Place 1位小数	Ra 1.6	Estimated Weight 预估重量 Scale 比例 Unit 绘图单位	N/A	1:6	mm
	±1.0	±0.2	±0.05		±2°	±0.5°					
Tolerance Unless Stated Otherwise 未注尺寸公差											

Description 产品名称		Helical Oil Separator Reservoir 螺旋油分离储液器			
Drawing No. 图纸编号	M050505650	REV 版本	A		
Material Master No. 物料编号	050505650	Drawing Size 图幅	A3		
Material 材质	Refer Table	Sheet Number 页码	1/1		
Attribute 属性	1 3/8" ODS	Third Angle Projection 第三视角			
Approved_by 批准	Julian Parker	2022/8/24			
Checked_by 审核	Leo Wu	2022/8/24			
Drawn_by 绘图	Angel Zhang	2022/8/24			