

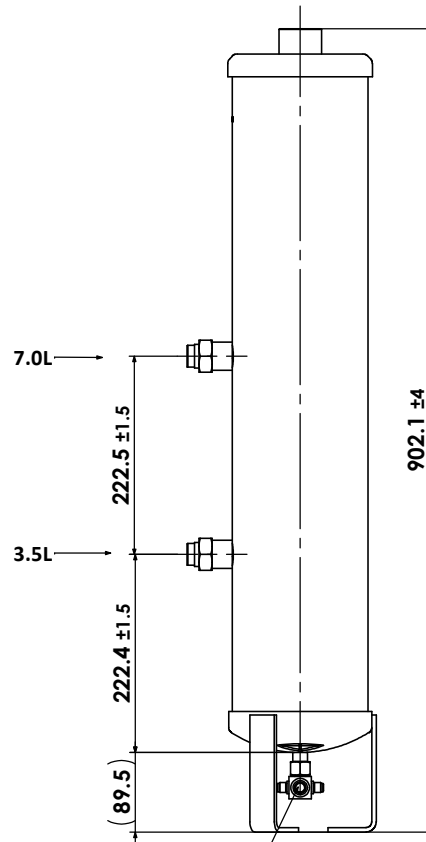


HGI Part No. S-5392-customer	01/07/2021 HENRY JTP APPROVED DOCUMENT	<input checked="" type="checkbox"/> PED 2014/68/EU <input checked="" type="checkbox"/> AS2971.2 <input checked="" type="checkbox"/> UL207				REV. 版本	ECN 工程变更通知	Description 变更描述	Name 变更人	Date 变更日期
		<input type="checkbox"/> CAT I <input type="checkbox"/> CAT II <input checked="" type="checkbox"/> CAT III B	B	ECN-HTZ1017	CAT III was CAT II.	Angel Zhang	2021/6/9			
Volume Ltrs	Shell ID mm	Design Pressure MPa	Leak Test Pressure MPa	Proof Test Pressure MPa	Min Burst Test Pressure MPa					
11.1	Ø145.4	3.1	3.1	4.44	15.5					

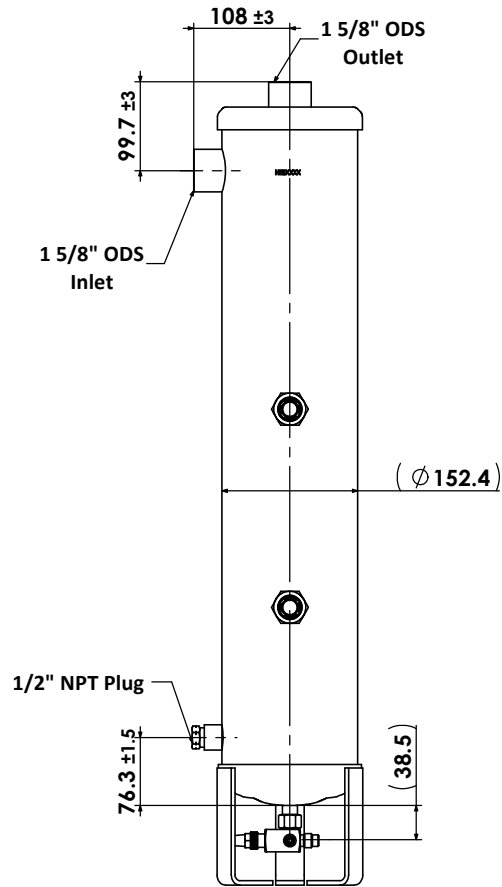


Stamp manufactory code and date code
冲印工厂代码和制造日期



ISO 1:8

Technical Requirements:
技术要求

1. Allowable operating temperature -10°C to +130°C;
工作温度-10°C到+130°C;
2. Powder coating: Henry Blue RAL 5013;
喷涂颜色: 亨利蓝RAL 5013 ;
3. Rotalock Valve and Gasket will be packed with product independently.
阀和垫圈随产品单独包装。



Oil Return Rotalock Valve
3/8" MSAE connection
3/4" rotalock connection

Description 产品名称	Helical Oil Separator Reservoir 螺旋油分离储液器		
Drawing No. 图纸编号	M050505068	REV 版次	B
Material Master No. 物料编号	050505068	Drawing Size 图幅	A3
Material 材质	N/A	Sheet Number 页码	1/1
Attribute 属性	1 5/8" ODS	Third Angle Projection 第三视角	
Approved_by 批准	Julian Parker	2019/5/29	
Checked_by 审核	Leo Wu	2019/5/29	
Drawn_by 绘图	Nancy Huang	2019/5/28	

Linear Dimensions 线性尺寸 (mm)	0 Decimal Place 整数	1 Decimal Place 1位小数	2 Decimal Place 2位小数	Angular Dimensions 角度尺寸	0 Decimal Place 整数	1 Decimal Place 1位小数	Ra 1.6	Estimated Weight 预估重量	N/A	Scale 比例	1:6	Unit 单位	mm
	±1.0	±0.2	±0.05		±2°	±0.5°							
Tolerance Unless Stated Otherwise 未注尺寸公差													