

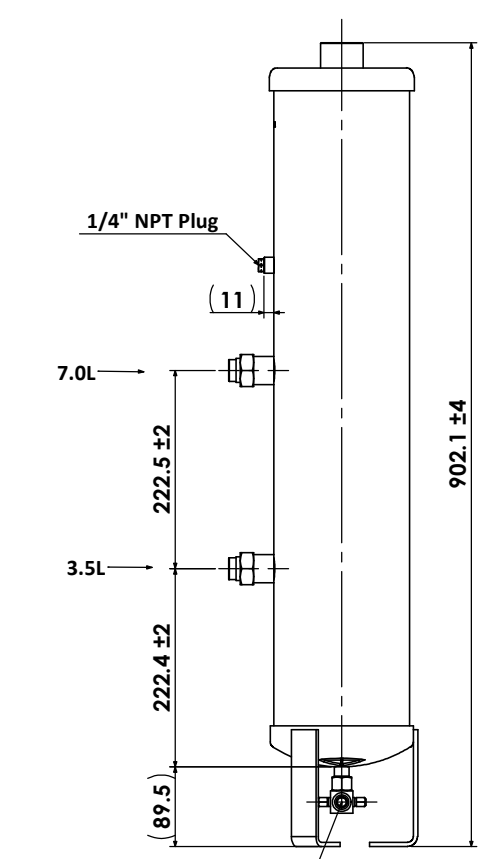


HGI Part No. S-5392-GY-customer	24/07/2020 HENRY JTP APPROVED DOCUMENT	<input checked="" type="checkbox"/> PED 2014/68/EU <input checked="" type="checkbox"/> AS2971.2 <input checked="" type="checkbox"/> UL207				REV. 版本	ECN 工程变更通知	Description 变更描述	Name 变更人	Date 变更日期
	<input type="checkbox"/> CAT I <input type="checkbox"/> CAT II <input checked="" type="checkbox"/> CAT III				Volume Ltrs	Shell ID mm	Design Pressure MPa	Leak Test Pressure MPa	Proof Test Pressure MPa	Min Burst Test Pressure MPa
				11.1	Ø145.4	3.1	3.1	4.44	15.5	

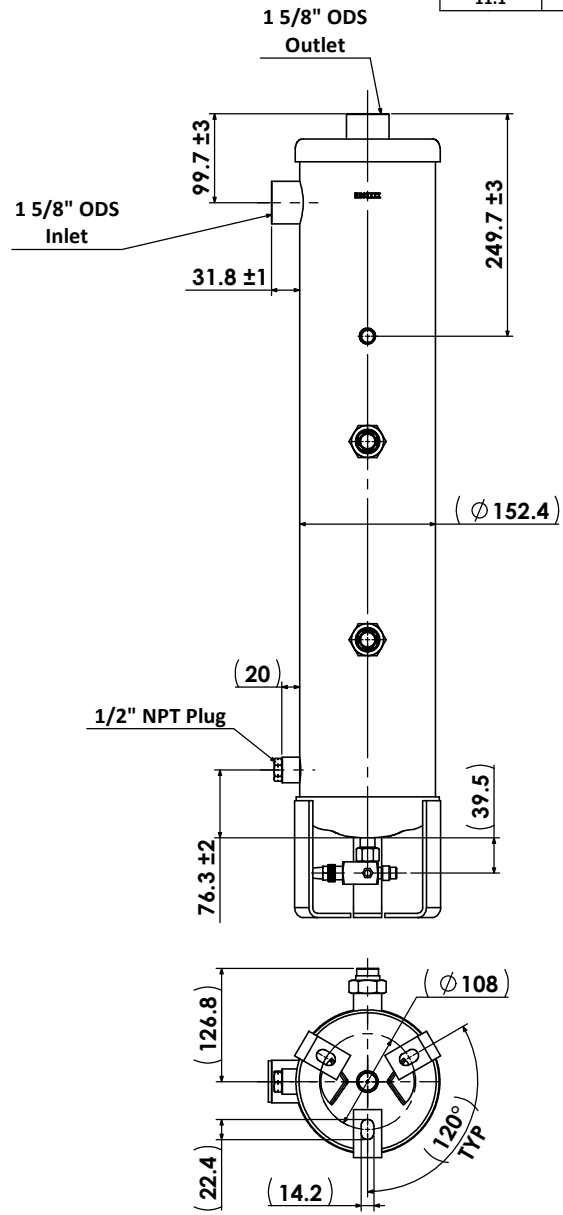

Stamp manufactory code and date code(HESXXXX)  
冲印工厂代码和制造日期(HESXXXX)

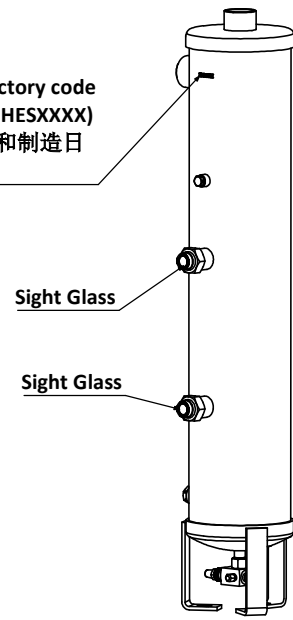

**Technical Requirements:**  
技术要求

1. Allowable operating temperature -10°C to +130°C;  
工作温度-10°C到+130°C;
2. Powder coating: Gray RAL 7035;  
喷涂颜色: 灰色RAL 7035 ;
3. Rotalock Valve and Gasket will be packed with product independently.  
阀和垫圈随产品单独包装。

Oil Return Rotalock Valve  
3/8" MSAE connection  
3/4" rotalock connection

Description 产品名称	Helical Oil Separator Reservoir 1 5/8" ODS 螺旋油分离器 1 5/8" ODS		
Drawing No. 图档编号	M050505282	REV 版次	A
Material Master No. 物料编号	050505282	Drawing Size 图幅	A3
Material 材质	N/A	Sheet Number 页码	1/1
Attribute 属性	1 5/8" ODS	Third Angle Projection 第三视角	
Approved_by 批准	Julian Parker	2020/07/23	
Checked_by 审核	Leo Wu	2020/07/23	
Drawn_by 绘图	Zhou Lei	2020/07/17	

Dimensions inside an oval are critical dimensions 椭圆内尺寸为关键尺寸	Linear Dimensions 线性尺寸 (mm)	0 Decimal Place 整数 ±1.0	1 Decimal Place 1位小数 ±0.2	2 Decimal Place 2位小数 ±0.05	Angular Dimensions 角度尺寸	0 Decimal Place 整数 ±2°	1 Decimal Place 1位小数 ±0.5°	Ra 1.6	Estimated Weight 预估重量	N/A	Scale 比例	1:6	Unit 绘图单位	mm
	Tolerance Unless Stated Otherwise 未注尺寸公差													