


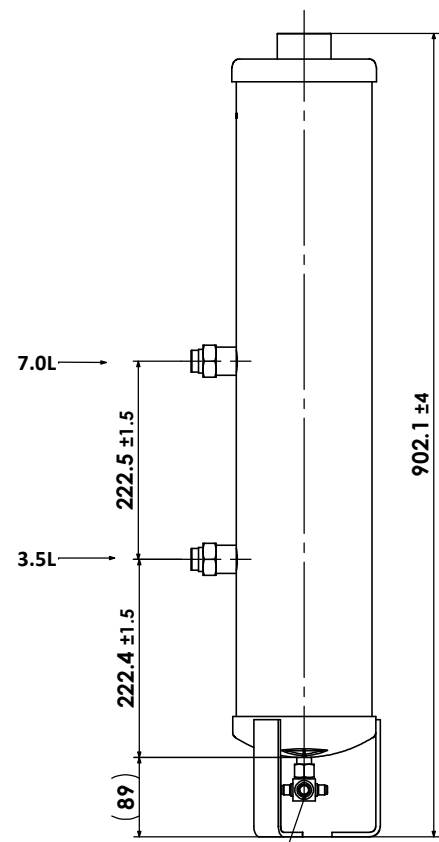


HGI Part No. S-5394-customer		05/07/2021 HENRY JTP APPROVED DOCUMENT		<input checked="" type="checkbox"/> PED 2014/68/EU <input type="checkbox"/> CAT I <input type="checkbox"/> CAT II <input checked="" type="checkbox"/> CAT III B		<input checked="" type="checkbox"/> AS2971.2 <input checked="" type="checkbox"/> UL207		REV. 版本 B	ECN 工程变更通知 ECN-HTZ1017	Description 变更描述 CAT III was CAT II.	Name 变更人 Angel Zhang	Date 变更日期 2021/6/9
Volume Ltrs	Shell ID mm	Design Pressure MPa	Leak Test Pressure MPa	Proof Test Pressure MPa	Min Burst Test Pressure MPa							
11.1	Ø145.4	3.1	3.1	4.44	15.5							

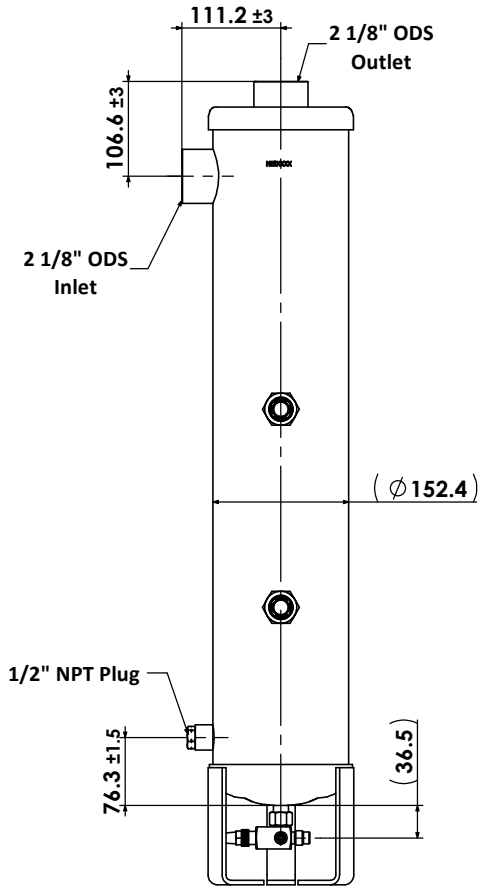

Oil Return
Rotalock Valve
3/8" MSAE connection
3/4" rotalock connection

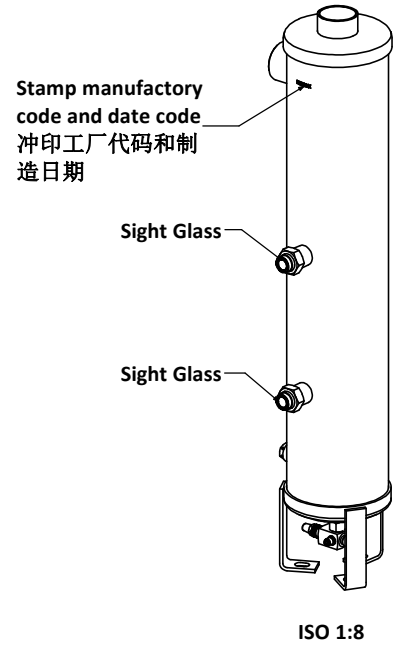

Technical Requirements:
技术要求

1. Allowable operating temperature -10°C to +130°C;
工作温度-10°C到+130°C;
2. Powder coating: Henry Blue RAL 5013;
喷涂颜色: 亨利蓝RAL 5013 ;
3. Rotalock Valve and Gasket will be packed with product independently.
阀和垫圈随产品单独包装。

Linear Dimensions 线性尺寸 (mm)	0 Decimal Place 整数	1 Decimal Place 1位小数	2 Decimal Place 2位小数	Angular Dimensions 角度尺寸	0 Decimal Place 整数	1 Decimal Place 1位小数	Ra 1.6	Estimated Weight 预估重量	N/A	Scale 比例	1:6	Unit 绘图单位	mm
	±1.0	±0.2	±0.05	±2°	±0.5°								
Tolerance Unless Stated Otherwise 未注尺寸公差													

Description 产品名称		Helical Oil Separator Reservoir 螺旋油分离储液器		
Drawing No. 图纸编号	M05050701	REV 版次	B	
Material Master No. 物料编号	05050701	Drawing Size 图幅	A3	
Material 材质	Refer Table	Sheet Number 页码	1/1	
Attribute 属性	2 1/8" ODS	Third Angle Projection 第三视角		
Approved_by 批准	Julian Parker	2019/5/29		
Checked_by 审核	Leo Wu	2019/5/29		
Drawn_by 绘图	Nancy Huang	2019/5/28		