

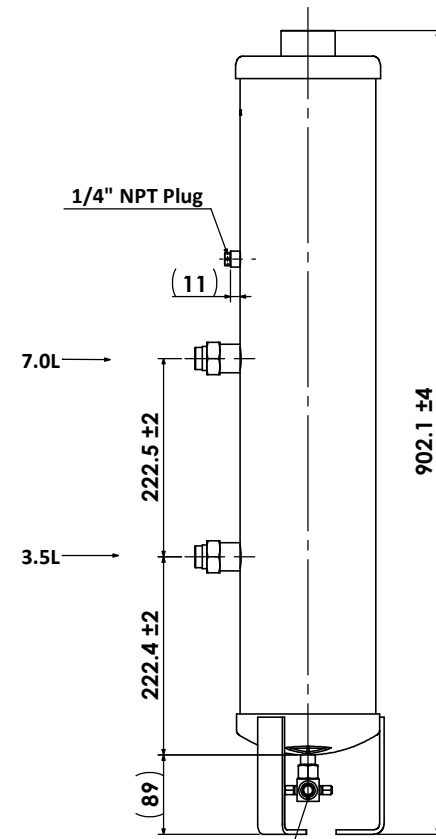



HGI Part No. S-5394-GY-customer	24/07/2020 HENRY JTP APPROVED DOCUMENT	<input checked="" type="checkbox"/> PED 2014/68/EU <input checked="" type="checkbox"/> AS2971.2 <input checked="" type="checkbox"/> UL207				REV. 版本	ECN 工程变更通知	Description 变更描述	Name 变更人	Date 变更日期
		<input type="checkbox"/> CAT I <input type="checkbox"/> CAT II <input checked="" type="checkbox"/> CAT III	Volume Ltrs	Shell ID mm	Design Pressure MPa	Leak Test Pressure MPa	Proof Test Pressure MPa	Min Burst Test Pressure MPa		
		11.1	Ø145.4	3.1	3.1	4.44	15.5			

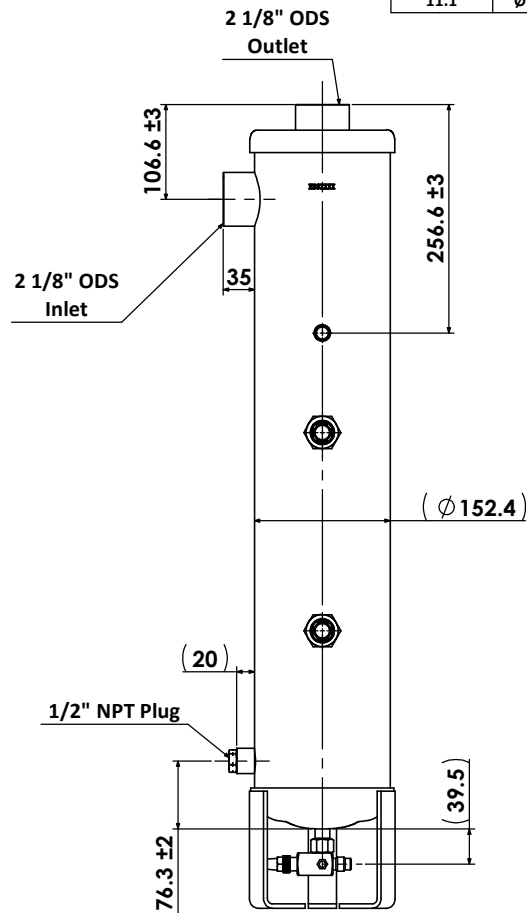

Oil Return  
Rotalock Valve  
3/8" MSAE connection  
3/4" rotalock connection

Stamp manufacturing code  
and date code(HESXXXX)  
冲印工厂代码和制造日期(HESXXXX)

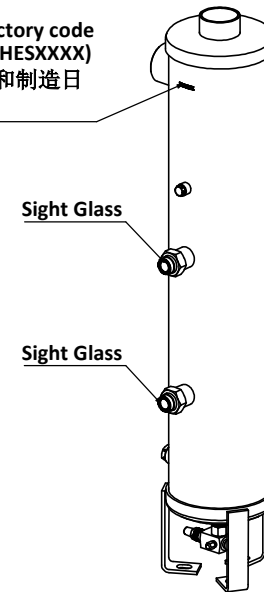

**Technical Requirements:**

技术要求

1. Allowable operating temperature -10°C to +130°C;  
工作温度-10°C到+130°C;
2. Powder coating: Gray RAL 7035;  
喷涂颜色: 灰色RAL 7035 ;
3. Rotalock Valve and Gasket will be packed with product independently.  
阀和垫圈随产品单独包装。

Description 产品名称	Helical Oil Separator Reservoir 2 1/8" ODS 螺旋油分离储液器 2 1/8" ODS		
Drawing No. 图档编号	M050505284	REV 版次	A
Material Master No. 物料编号	050505284	Drawing Size 图幅	A3
Material 材质	Refer Table	Sheet Number 页码	1/1
Attribute 属性	2 1/8" ODS	Third Angle Projection 第三视角	
Approved_by 批准	Julian Parker	2020/07/23	
Checked_by 审核	Leo Wu	2020/07/23	
Drawn_by 绘图	Zhou Lei	2020/07/20	

Dimensions inside an oval  
are critical dimensions  
椭圆内尺寸为关键尺寸

Linear Dimensions  
线性尺寸(mm)

0 Decimal Place  
±1.0

1 Decimal Place  
±0.2

2 Decimal Place  
±0.05

Angular Dimensions  
角度尺寸

0 Decimal Place  
±2°

1 Decimal Place  
±0.5°

Ra 1.6

Estimated Weight  
预估重量  
Scale 比例  
Unit 单位  
绘图单位

N/A  
1:6  
mm

Tolerance Unless Stated Otherwise  
未注尺寸公差