
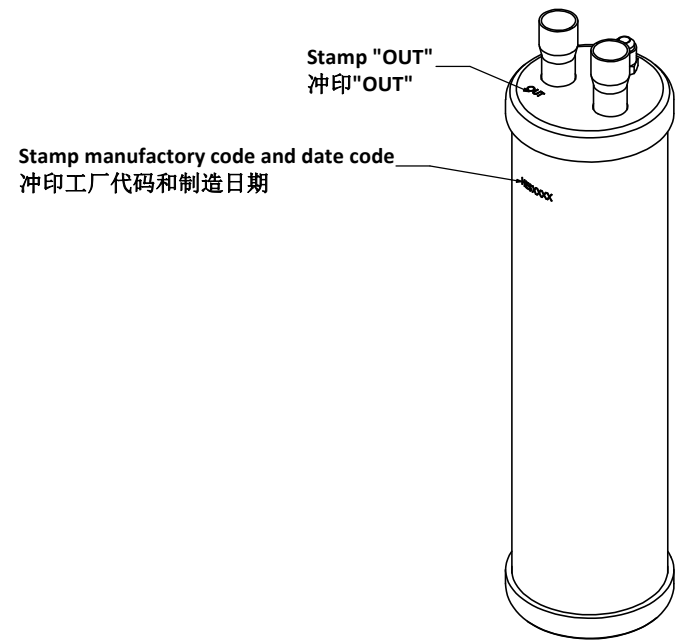
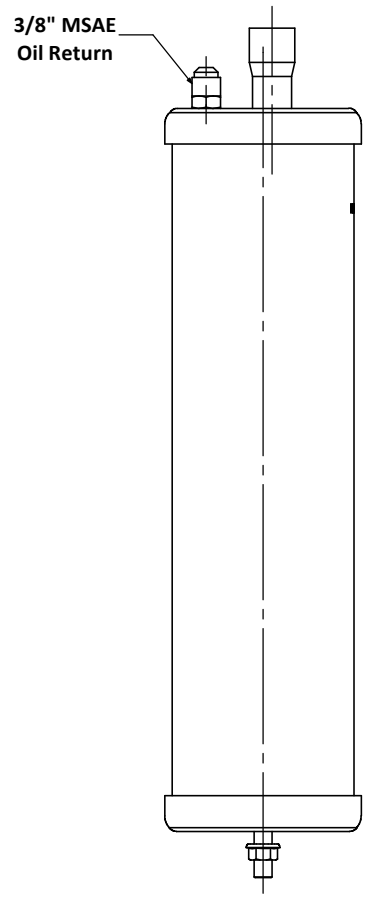


HGI Part No. S-5587-customer	30/05/2022 HENRY JTP APPROVED DOCUMENT	<input checked="" type="checkbox"/> PED 2014/68/EU <input checked="" type="checkbox"/> AS2971.2 <input checked="" type="checkbox"/> UL207				REV. 版本	ENC 工程变更通知	Description 变更描述	Name 变更人	Date 变更日期
		<input type="checkbox"/> CAT I <input checked="" type="checkbox"/> CAT II	Volume Ltrs	Shell ID mm	Design Pressure MPa	Leak Test Pressure MPa	Proof Test Pressure MPa	Min Burst Test Pressure MPa	CAT II was CAT I, Seamless tube flaring replaces machined fitting	Angel Zhang
		2.8	∅97	3.1	3.1	4.43	Pre-charge Volume 500 ml/ 17 fl.oz. WAS 600 ml/ 21 fl.oz.	Angel Zhang	2022/5/20	

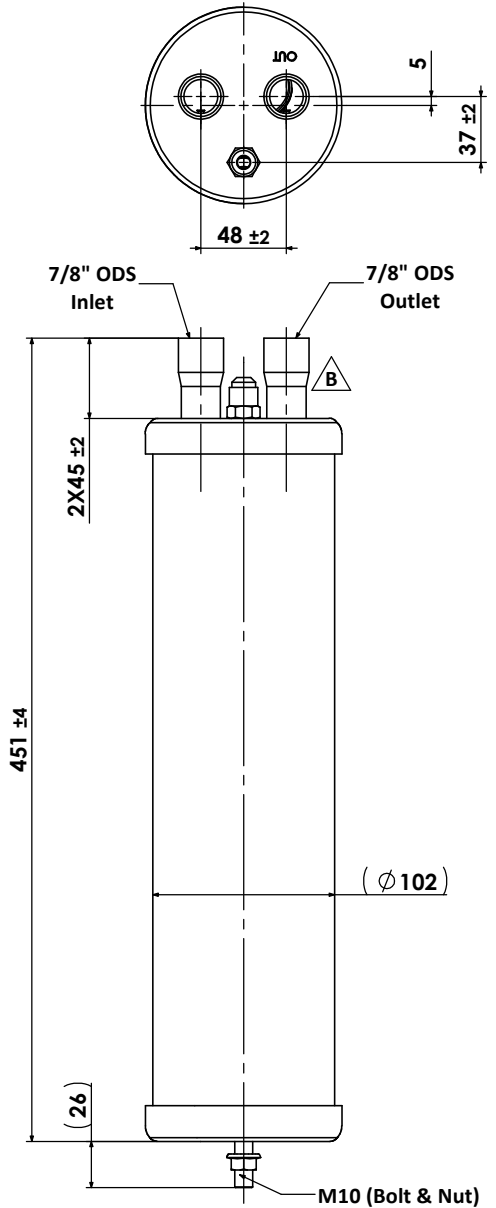

- Technical Requirements:**  
技术要求
- Pre-charge Volume 500 ml/ 17 fl.oz.;  
预充油体积: 500 ml/ 17 fl.oz.; C
  - Allowable operating temperature -10°C to +130°C;  
工作温度-10°C到+130°C;
  - Powder coating: Henry Blue RAL 5013.  
喷涂颜色: 亨利蓝RAL 5013。

Description 产品名称		Oil Separator 油分离器		
Drawing No. 图纸编号	M050509930	REV 版次	C	
Material Master No. 物料编号	050509930	Drawing Size 图幅	A3	
Material 材质	N/A	Sheet Number 页码	1/1	
Attribute 属性	7/8" ODS	Third Angle Projection 第三视角		
Approved_by 批准	Julian Parker	2021/10/14		
Checked_by 审核	Leo Wu	2021/10/14		
Drawn_by 绘图	Nancy Huang	2018/11/2		

Linear Dimensions 线性尺寸 (mm)	0 Decimal Place 整数	1 Decimal Place 1位小数	2 Decimal Place 2位小数	Angular Dimensions 角度尺寸	0 Decimal Place 整数	1 Decimal Place 1位小数	Estimated Weight 预估重量	N/A	Scale 比例	Unit 绘图单位
	±1.0	±0.2	±0.05		±2°	±0.5°				
Tolerance Unless Stated Otherwise 未注尺寸公差										