



HGI Part No. S-7057-customer	04/03/2025 HENRY JTP APPROVED DOCUMENT	<input checked="" type="checkbox"/> PED 2014/68/EU <input checked="" type="checkbox"/> AS2971.2				<input checked="" type="checkbox"/> UL207		REV. 版本	ECN 工程变更通知	Description 变更描述	Name 变更人	Date 变更日期
		<input type="checkbox"/> CAT I <input checked="" type="checkbox"/> CAT II <input checked="" type="checkbox"/> C	Volume Ltrs	Shell ID mm	Design Pressure MPa	Leak Test Pressure MPa	Proof Test Pressure MPa	Min Burst Test Pressure MPa	B	ECN-HT19018	S-7057-customer was SA-7057K-customer. Add 1/4" NPT plug.	Nancy Huang
		3.2	∅121	3.1	3.1	4.43	C	ECN-HT20010	Add UL207;CAT II was CAT I; 15.5 was 13.7	Zhou Lei	2020/03/30	
							C	ECN-HT25002	Design temperature updated from -30°C~50°C to -30°C~80°C	Qiu Leixin	2025/02/19	

B

Stamp "IN"
冲印"IN"

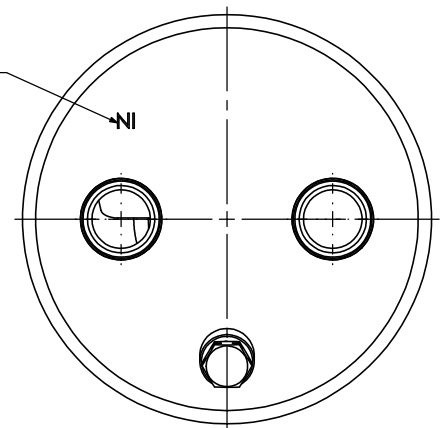


7/8" ODS Copper Inlet 70 ±2 7/8" ODS Copper Outlet

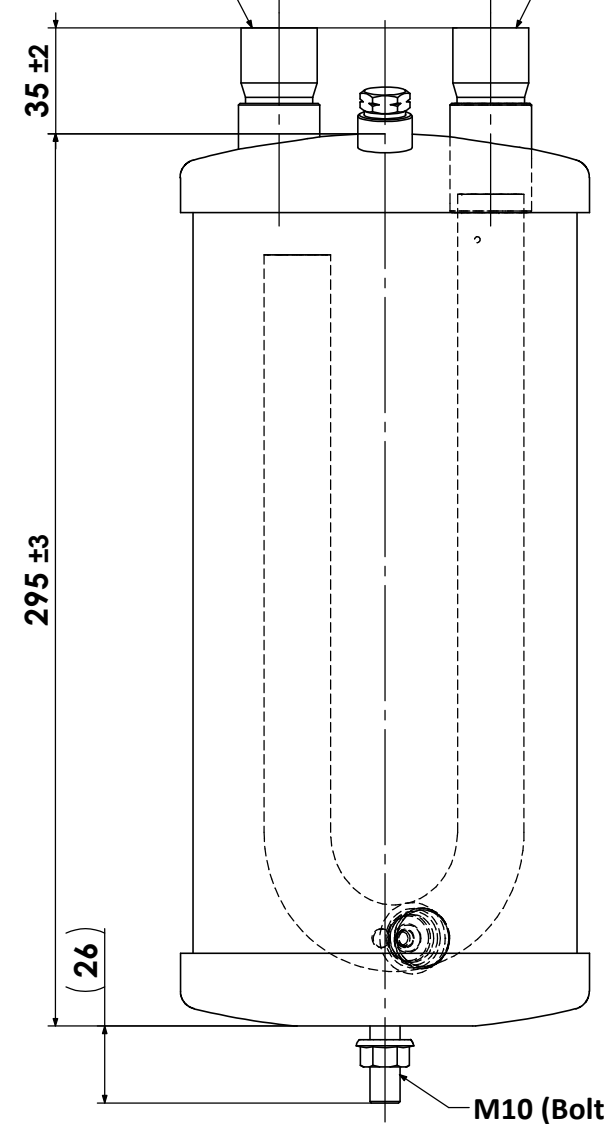

M10 (Bolt & Nut)


1/4" NPT plug

B

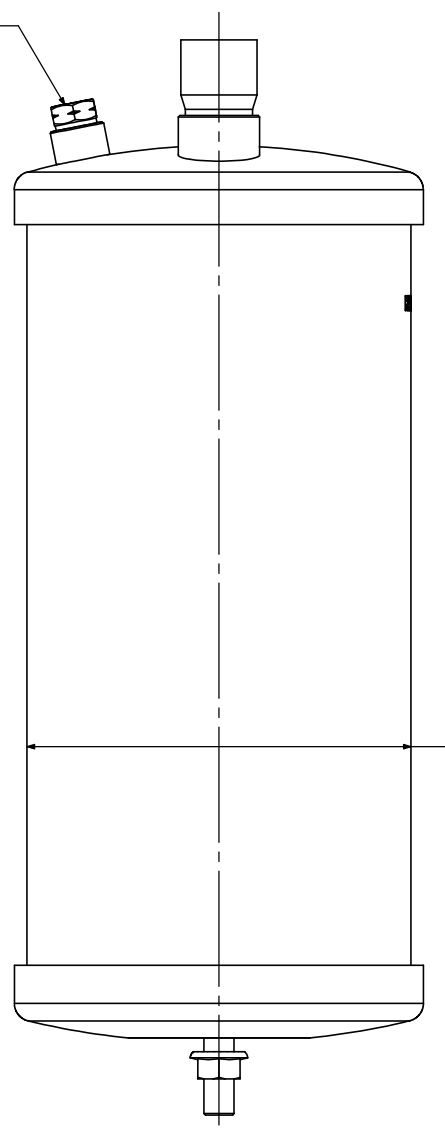

(∅127)

Stamp factory code and date code
冲印工厂代码和制造日期

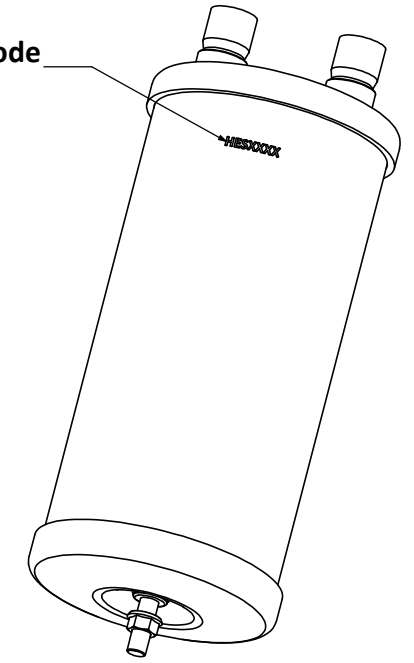

Technical Requirements:
技术要求

- Allowable operating temperature -30°C to +80°C; 工作温度-30°C到+80°C;
- Powder coating: Henry Blue RAL 5013. 喷涂颜色: 亨利蓝RAL 5013.

D

Description 产品名称	Suction Accumulator 3.2L 气液分离器 3.2L		
Drawing No. 图纸编号	M050509961	REV 版次	D
Material Master No. 物料编号	050509961	Drawing Size 图幅	A3
Material 材质	N/A	Sheet Number 页码	1/1
Attribute 属性	7/8" ODS	Third Angle Projection 第三视角	

Linear Dimensions 线性尺寸 (mm)	0 Decimal Place 整数	1 Decimal Place 1位小数	2 Decimal Place 2位小数	Angular Dimensions 角度尺寸	0 Decimal Place 整数	1 Decimal Place 1位小数	Ra 1.6 	Estimated Weight 预估重量	N/A	Approved_by 批准	Julian Parker	2025/02/19
	±1.0	±0.2	±0.05		±2°	±0.5°		Scale 比例	1:2.5	Checked_by 审核	Leo Wu	2025/02/19
Tolerance Unless Stated Otherwise 未注尺寸公差								Unit 绘图单位	mm	Drawn_by 绘图	Nancy Huang	2018/10/19

