
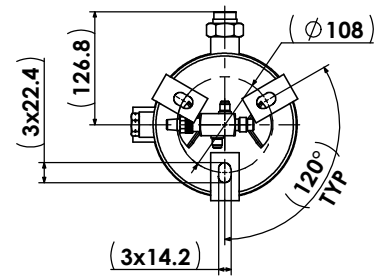
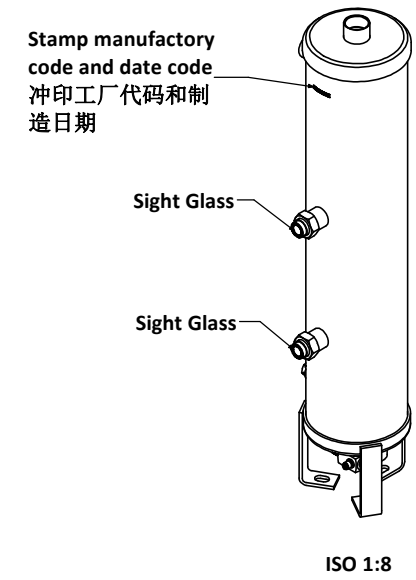
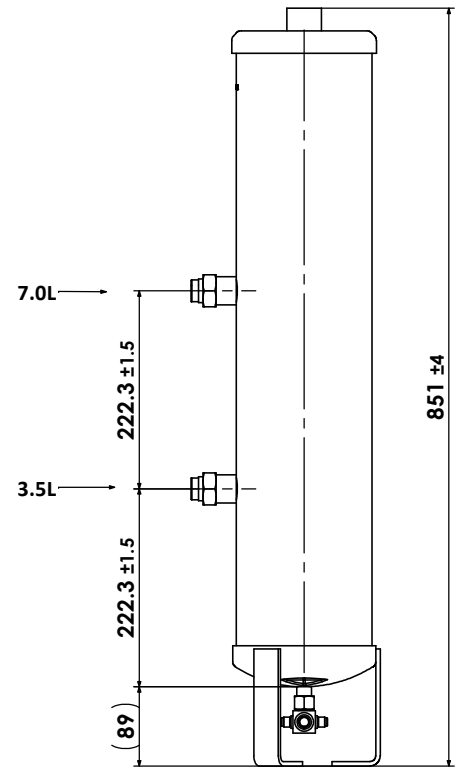


HGI Part No. S-5390-customer		01/07/2021 HENRY JTP APPROVED DOCUMENT		<input checked="" type="checkbox"/> PED 2014/68/EU <input type="checkbox"/> CAT I <input type="checkbox"/> CAT II <input checked="" type="checkbox"/> CAT III <input checked="" type="checkbox"/> B		AS2971.2		UL207		REV. 版本 B	ECN 工程变更通知 ECN-HTZ1017	Description 变更描述 CAT III was CAT II.	Name 变更人 Angel Zhang	Date 变更日期 2021/6/9
Volume Ltrs	Shell ID mm	Design Pressure MPa	Leak Test Pressure MPa	Proof Test Pressure MPa	Min Burst Test Pressure MPa									
12.05	Ø145.4	3.1	3.1	4.44	15.5									

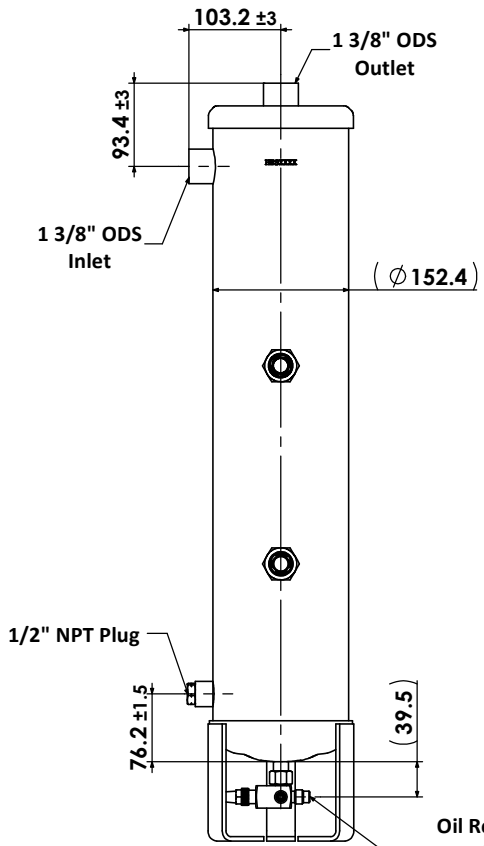

- Technical Requirements:**
技术要求
1. Allowable operating temperature -10°C to +130°C; 工作温度-10°C到+130°C;
 2. Powder coating: Henry Blue RAL 5013; 喷涂颜色: 亨利蓝RAL 5013 ;
 3. Rotalock Valve and Gasket will be packed with product independently. 阀和垫圈随产品单独包装。

Description 产品名称 Helical Oil Separator Reservoir 螺旋油分离器			
Drawing No. 图纸编号	M050505065	REV 版次	B
Material Master No. 物料编号	050505065	Drawing Size 图幅	A3
Material 材质	Refer Table	Sheet Number 页码	1/1
Attribute 属性	1 3/8" ODS	Third Angle Projection 第三视角	
Approved_by 批准	Julian Parker	2019/5/29	
Checked_by 审核	Leo Wu	2019/5/29	
Drawn_by 绘图	Nancy Huang	2019/5/28	

Linear Dimensions 线性尺寸 (mm)	0 Decimal Place 整数	±1.0	1 Decimal Place 1位小数	±0.2	2 Decimal Place 2位小数	±0.05	Angular Dimensions 角度尺寸	0 Decimal Place 整数	±2°	1 Decimal Place 1位小数	±0.5°	Estimated Weight 预估重量 Scale 比例 Unit 绘图单位	N/A	1:6	mm
	Tolerance Unless Stated Otherwise 未注尺寸公差														